

SANYO	No. 5115	LC89915, 89915M
		NTSC 1 H Delay Line

Overview

The LC89915 and LC89915M are delay lines that produce a 1 H delayed signal for NTSC format with an external low-pass filter. It can also provide 1 H delayed signal for PAL format by changing the number of its CCD shift register.

Functions

- 453.5 bits (switchable to 456.5 bits) CCD shift register
- Auto-bias circuit
- Sync tip clamping circuit
- Sample-and-hold circuit
- Delay time switching circuit


Features

- Single 5 V power supply
- Operates on a low-amplitude clock input.
- Built-in peripheral circuits allow applications to be constructed with a minimum number of external components.
- Positive-phase signal input/positive-phase signal output
- Control pin switchable to provide a PAL 1 H delayed signal.

Package Dimensions


unit: mm

3001B-DIP8

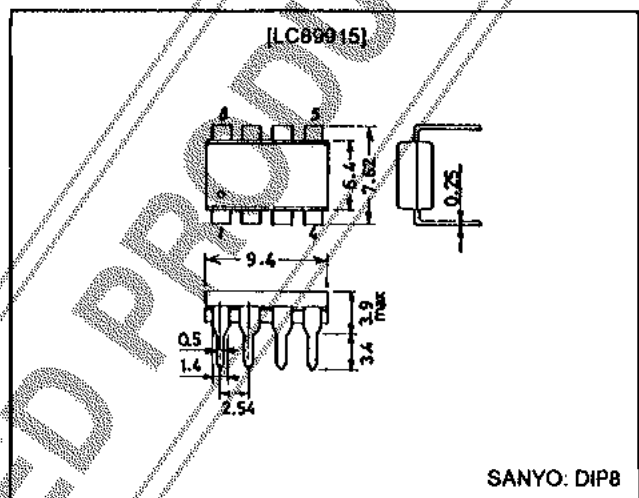

unit: mm

3032B-MFP8

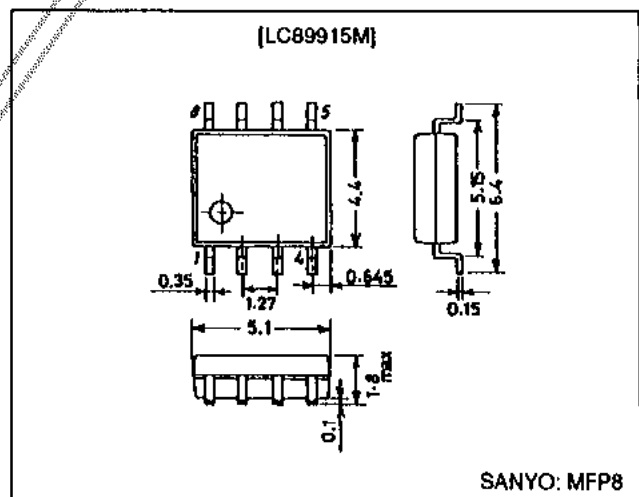

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{DD\ max}$		-0.3 to +6.0	V
Allowable power dissipation	$P_d\ max$	LC89915	400	mW
		LC89915M	140	mW
Operating temperature	T_{opr}		-10 to +60	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$


LC89915, 89915M

Allowable Operating Ranges at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	min	typ	max	Unit
Supply voltage	V_{DD}		4.75	5.00	5.25	V
Clock input amplitude	V_{CLK}	Sine wave	100	300	1000	mVp-p
Clock frequency	F_{CLK}		—	7.1500909	—	MHz
Signal input amplitude	V_{IN}	*	—	500	—	mVp-p

Note: * Connect the input signal with a low impedance to assure correct sync tip clamping.


Pin Assignment

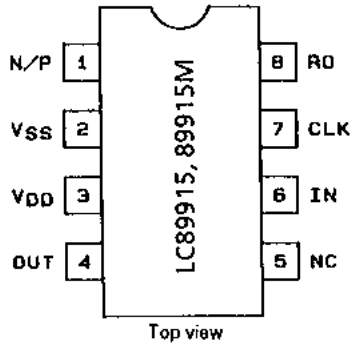

Pin Functions

Pin No.	Symbol	Function
1	N/P	Delay time switching
2	V_{SS}	GND
3	V_{DD}	Power supply
4	OUT	Delayed signal output
5	NC	
6	IN	Signal input
7	CLK	Clock input
8	RD	RD-voltage generator output

Block Diagram

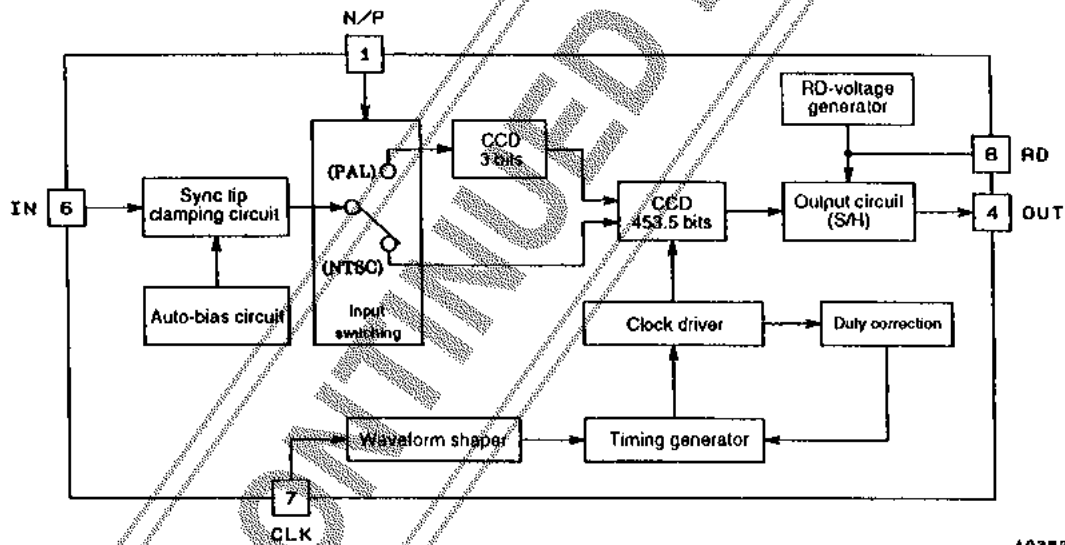

Functional Description

The delay time can be switched with the N/P control pin (pin 1).

0 V — NTSC mode


The CCD has a length of 453.5 bits and the delay time corresponds to 1 H (63.5 μs) in the NTSC format.

5 V — PAL mode

The CCD has a length of 456.5 bits and the delay time corresponds to 1 H (64.0 μs) in the PAL format.

Electrical Characteristics at Ta = 25°C, VDD = 5.0 V, CLK = 7.159099 MHz; 300 mVp-p; sine wave


Parameter	Symbol	Conditions	min	typ	max	Unit
Current drain	IDD	No signal input	4	6	12	mA
Voltage gain	Gv	With a 200 kHz 0.5 Vp-p input	2.5	4.5	6.5	dB
Frequency characteristics	Gf	2.0 MHz, 0.2 Vp-p/200 kHz, 0.2 Vp-p	-3.0	-1.5		dB
Linearity	L6	*	56	60	64	%
	L2	*	18	20	22	%
	Ls	*	37	40	43	%
Clock leakage	LCLK	No signal input, the 2 fsc component		10	30	mVrms
Noise	NO	No signal input, 4.2 MHz bandwidth		1.0	2.0	mVrms
Output impedance	ZO		200	300	400	Ω
Delay time	TD-N			63.44		μs
	TD-P			63.66		μs

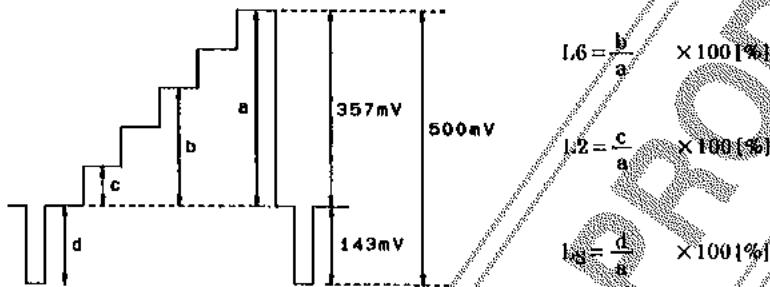

A03627

Note: * Input signal/output signal

Sample Application Circuit

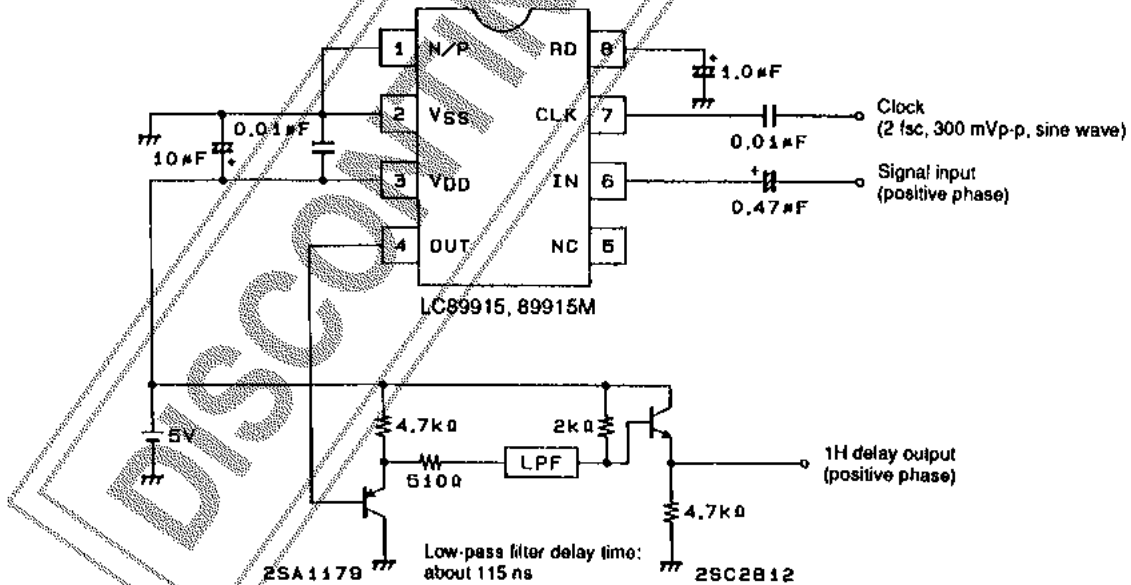

A03628