



Function Switch

Use

Function switchover of amplifier, receiver, etc. and tape monitor control

Features

- (1) 2-channel 5-position source select + tape monitor on chip
- (2) Control input pins of input/output common type (Key input and LED display)
- (3) Delivers audio muting control signal.
- (4) Possible to select operation modes of backup mode, initialization mode, automatic switchover of function
- (5) Supply voltage $\pm 20V$, single-supply operation available

Absolute Maximum Ratings at $T_a = 25^\circ C, V_{SS} = 0V$


Parameter	Symbol	Conditions	Value	unit
Maximum Supply Voltage	$V_{DD} \text{ max}$	V_{DD}	$V_{SS} - 0.3 \text{ to } +20$	V
	$V_{EE} \text{ max}$	V_{EE}	$-20 \text{ to } V_{SS} + 0.3$	V
Output Voltage	V_{OUT}	ACTL to ECTL TMOUT	$V_{SS} - 0.3 \text{ to } V_{DD} + 0.3$	V
Output Current	I_{OUT}	"	30	mA
Voltage Difference at Analog Switch-ON Mode	ΔV_{on}	Switch ON	0.5	V
Allowable Power Dissipation	$P_d \text{ max}$	$T_a \leq 85^\circ C$	500	mW
Operating Temperature	T_{opg}		$-30 \text{ to } +75$	$^\circ C$
Storage Temperature	T_{stg}		$-40 \text{ to } +125$	$^\circ C$

Allowable Operating Conditions at $T_a = 25^\circ C, V_{SS} = 0V, |V_{DD}| \geq |V_{EE}|$

Parameter	Symbol	Conditions	min	typ	max	unit
Supply Voltage	V_{DD1}	V_{DD}	$V_{SS} + 6$	$V_{SS} + 18.5$		V
	V_{EE}	V_{EE}	$V_{SS} - 18.5$		V_{SS}	V
	V_{DD2}	V_{DD}	$V_{SS} + 3$	$V_{SS} + 18.5$		V
		$V_{EE} \leq V_{SS} \text{ backup}$				


Continued on next page.

Pin Assignment

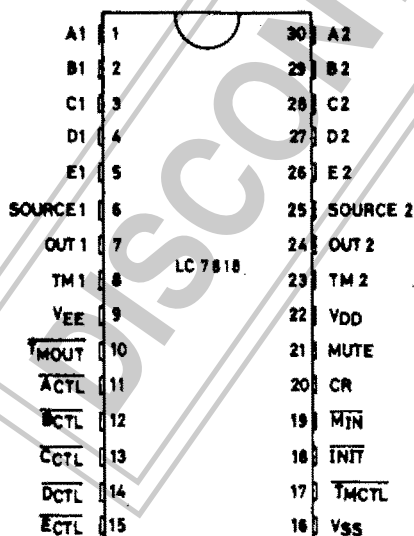

Package Dimensions 3047A

(unit: mm)

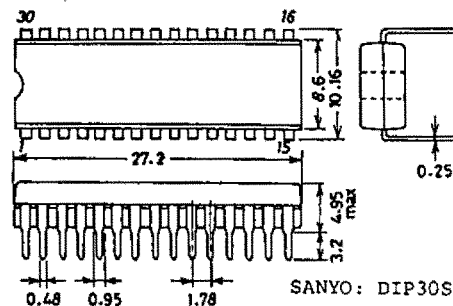

LC7818

Continued from preceding page.


			min	typ	max	unit
Input "H" Level Voltage	V _{IH}	ACTL to ECTL, TMCTL	0.7V _{DD}		V _{DD}	V
		MTR	V _{DD} -1.0		V _{DD}	V
		INIT	V _{SS} +3.0		V _{DD}	V
Input "L" Level Voltage	V _{IL}	ACTL to ECTL, TMCTL	V _{SS}	0.25V _{DD}		V
		MTR	V _{SS}	V _{SS} +1.0		V
		INIT	V _{SS}	V _{SS} +0.5		V
Input "M" Level Voltage	V _{IM}	MTR	0.45V _{DD}	0.55V _{DD}		V
Analog Switch Input Voltage Range	V _{IN}	A1 to E1, A2 to E2 SOURCE1,2 TM1,2	V _{EE}		V _{DD}	V

Electrical Characteristics at Ta = 25°C, V_{SS} = 0V, |V_{DD}| ≥ |V_{EE}|

				min	typ	max	unit
Output "H" Level Voltage	V _{OH}	MUTE	I _{OH} = -0.4mA, V _{DD} ≥ 9V	V _{DD} -0.5		V _{DD}	V
Output "L" Level Voltage	V _{OL1}	ACTL to ECTL TMOUT	I _{OL} = 30mA, V _{DD} = 18V	0		2	V
	V _{OL2}	MUTE	I _{OL} = 0.4mA, V _{DD} ≥ 9V	0		0.5	V
Analog Switch-ON Resistance	R _{on}	A1 to E1, A2 to E2 TM1, TM2	I = 1mA, V _{DD} - V _{EE} = 12V		120		Ω
		OUT1, OUT2	I = 1mA, V _{DD} - V _{EE} = 18V		80		Ω
			I = 1mA, V _{DD} - V _{EE} = 37V		70		Ω
Input/Output OFF Leak Current	I _{OFF1}	ACTL to ECTL TMOUT	V _O = V _{SS} + 18V			10	μA
	I _{OFF2}	CR	V _O = V _{SS} + 18V			1	μA
	I _{OFF3}	A1 to E1, A2 to E2 TM1,2, OUT1,2	Analog SW OFF V _{IN} = V _O = V _{EE} to V _{EE} + 37V	-1		1	μA
Total Harmonic Distortion	THD	SOURCE1,2 OUT1,2	V _{IN} = 1V _{rms} , f = 1kHz, V _{DD} - V _{EE} = 15 to 37V	0.0015	0.01		%
Feedthrough	FTH	A1 to E1 SOURCE1 OUT1 A2 to E2 SOURCE2 OUT2	V _{DD} - V _{EE} = 37V, f = 10kHz V _{IN} = 0.77V _{rms} R _L = 47kΩ		55		dB
Crosstalk	CT	A1 to E1 SOURCE2 OUT2 A2 to E2 SOURCE1 OUT1	V _{DD} - V _{EE} = 37V, f = 10kHz V _{IN} = 0.77V _{rms} R _L = 47kΩ		75		dB
Current Dissipation	I _{DD}	V _{DD}	Operating mode V _{DD} - V _{EE} = 37V			1	mA
Muting Time	T _M	MUTE			OSC period x 21		
Input Accept Pulse Width (Switch Select)	T _{IN(1)}	ACTL to ECTL TMCTL			OSC period x 3		
Input Accept Pulse Width (Muting Output)	T _{IN(2)}	ACTL to ECTL TMCTL			OSC period x 1		
External Capacitance for CR OSC	C ₁	CR		0.001		0.1	μF
OSC Period	T ₁	CR	V _{DD} - V _{SS} = 6V	0.4C ₁ R ₁	0.7C ₁ R ₁		
	T ₂	CR	V _{DD} - V _{SS} = 18.5V	0.3C ₁ R ₁	0.6C ₁ R ₁		
Current Dissipation	I _{DD} back up	V _{DD}	back up V _{DD} = 5V, V _{EE} = V _{SS} = 0V			1	μA

Operation caused by combination of INIT, Min inputs

INIT	Min	Operation
H	M	Normal
H	L	Backup
H	H	Auto function
L	M	Muting
L	L	Initialize (A circuit)
L	H	Reset



Pin Description

Pin Name	Pin No.	Input/Output Configuration	Function
VDD	22		• Power supply pin
VSS	16		Single supply (+): VSS=VEE=GND
VEE	9		Dual supply (±): VSS=GND, VEE=(-)V
A1, B1	1, 2		• A to E, TM: Audio signal input pin
C1, D1	3, 4		• SOURCE: Output pin for REC
E1, TM1	5, 8		• OUT: Audio signal output pin
A2, B2	30, 29		
C2, D2	28, 27		
E2, TM2	26, 23		
SOURCE1	6		
SOURCE2	25		
OUT1	7		
OUT2	24		
TMOUT	10		• TM ON/OFF-state display LED driver output
ACTL	11		• Input/output pin for analog switch control and its state display LED driver output
BCTL	12		
CCTL	13		
DCTL	14		
ECTL	15		
TMCTL	17		• Input pin for TM control
INIT	18		• Input pin for mode setting (Details are given on page 2.)
MIN	19		• Input pin for mode setting (Details are given on page 2.)
CR	20		• Input/output pin for clock generation C1, R1 are connected.
MUTE	21		• Output pin for muting control


Note: Priority for simultaneous push of keys is given as shown below.

TMCTL > ACTL > BCTL > CCTL > DCTL > ECTL

The pin (ACTL to ECTL pins) whose LED driver is turned ON (function selected) does not accept key input. Key input to such pin causes no operation to occur.



- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Equivalent Circuit Block Diagram

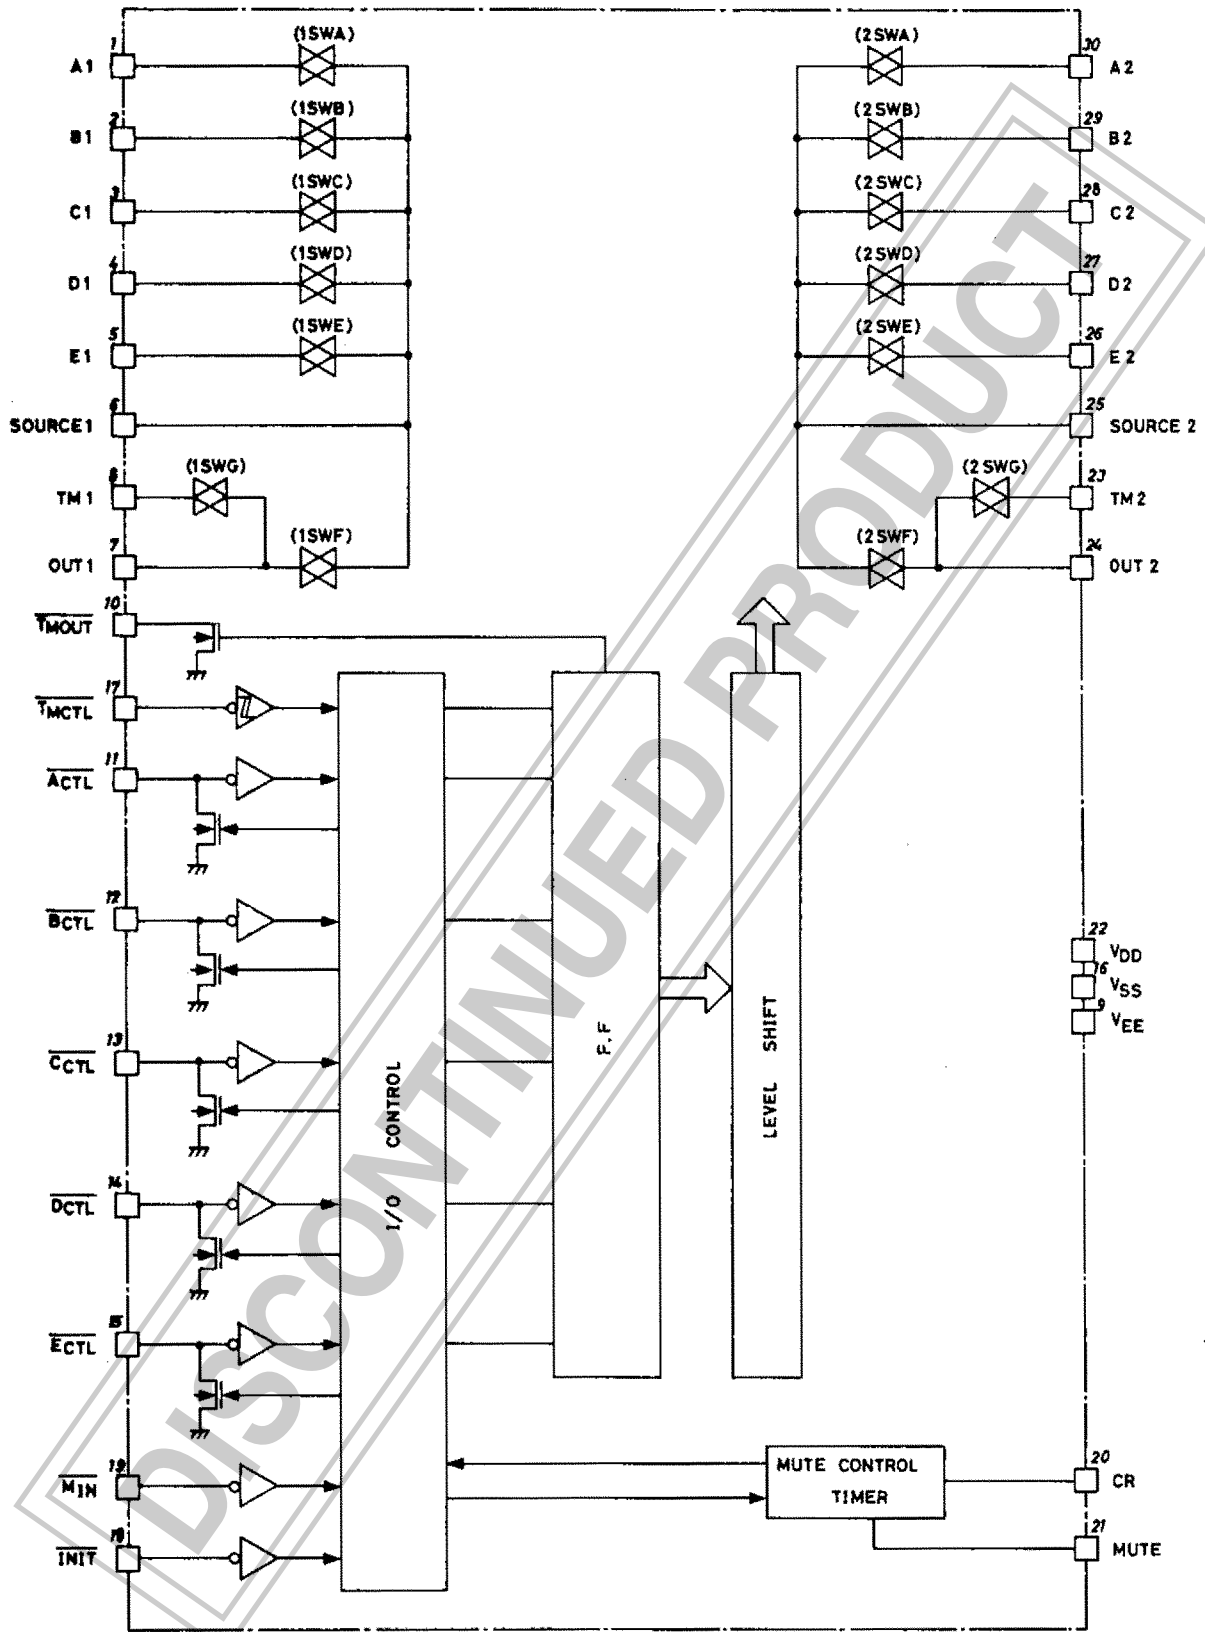



Application Circuit

- (1) Initialization, muting mode
(One channel only is shown below.)

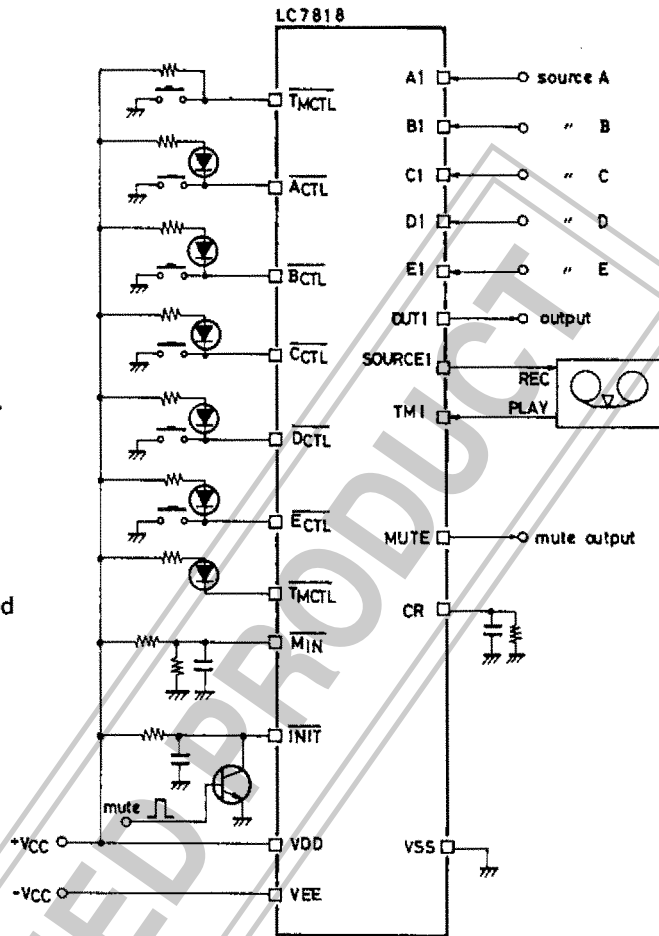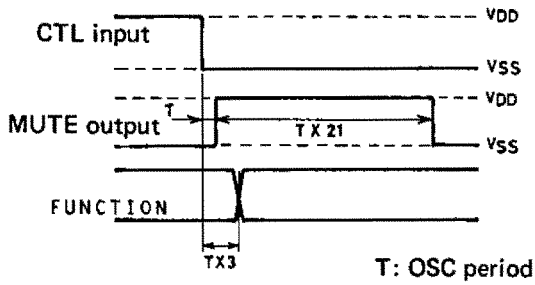


- (2) Backup mode
(Audio section, MUTE circuit are omitted.)


If the power switch is set to the primary side at the backup mode and it takes time for +B to fall when power is turned OFF, the MIN pin must be brought to "L" state before the ACTL to ECTL, TMCTL pins are brought to "L" state or the MIN pin must be brought to "L" state within OSC period x 3 in case the ACTL to ECTL, TMCTL pins are brought to "L" state earlier; otherwise the function may be shifted to another.

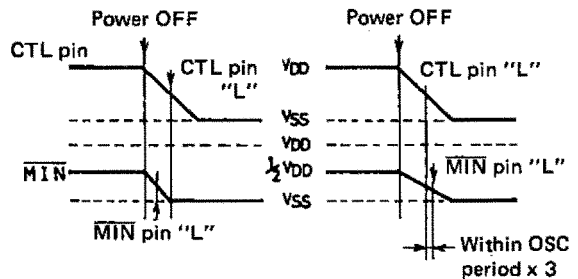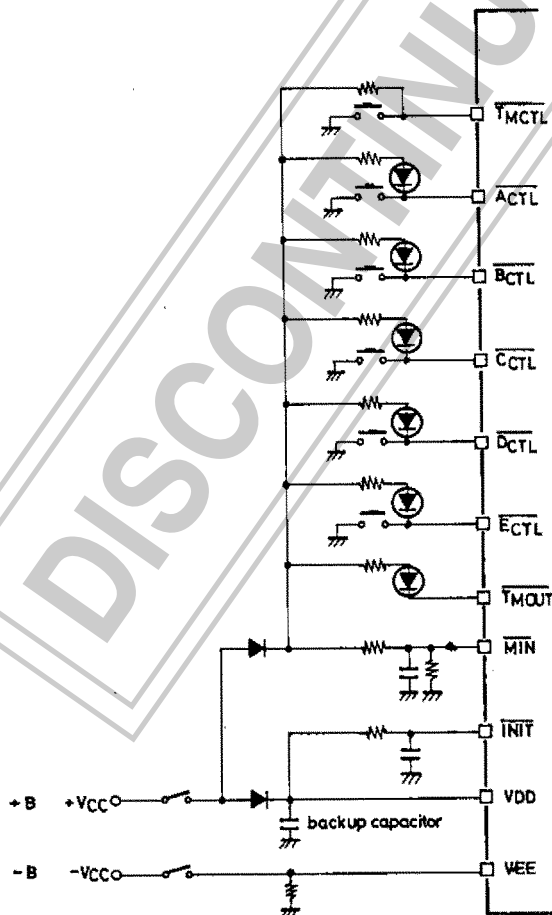

(3) Auto function, backup mode

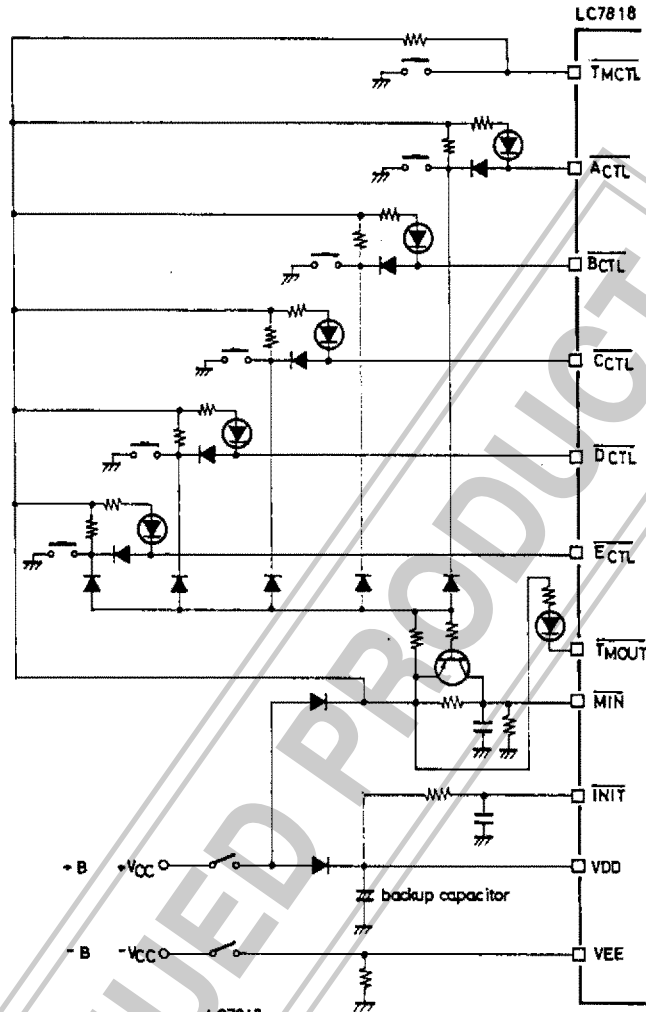

(4) Auto function, initialization, reset mode

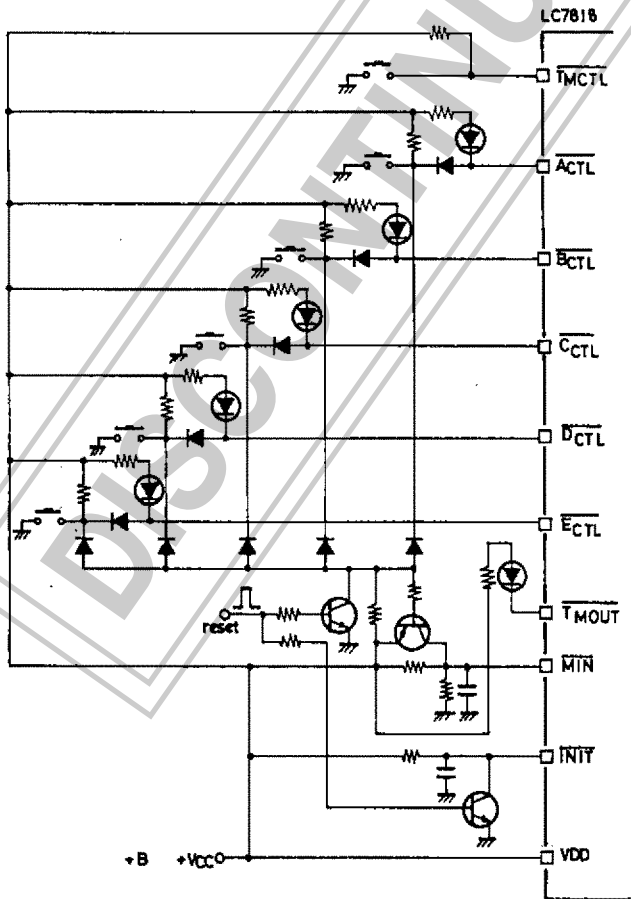

INIT	MIN	Operation	Description
H	M	Normal	<ul style="list-style-type: none"> This state is kept at the normal operation mode.
H	L	Backup mode	<ul style="list-style-type: none"> The backup mode is entered at this state.
H	H	Auto function (TM reset)	<ul style="list-style-type: none"> When the $\overline{A-ECTL}$ to \overline{ECTL} input occurs, set to this state.
L	M	Muting	<ul style="list-style-type: none"> When applying muting regardless of the function select key, set to this state.
L	L	Initialization (A circuit ON)	<ul style="list-style-type: none"> The TM is turned OFF and the A circuit is turned ON. <ul style="list-style-type: none"> To initialize, hold this state for OSC period x 3 or greater.
L	H	Reset	<ul style="list-style-type: none"> All input circuits are turned OFF.